

PRODUCT SPECIFICATION



Part No.: SRH-21WW35PB-3000GK
High Power LED


TABLE OF CONTENTS

1. Product Features.....	P2
2. Mechanical Dimensions	P2
3. Absolute Maximum Rating	P3
4. Optical Character	P3
5. Optical Character Curves	P4
6. Spectrum Curves	P5
7. Viewing Angle Curves.....	P5
8. Storage & Packaging	P6

1. Product Features

- High Power Warm White LED
- Clear Silicone Dome Lens
- Viewing Angle: 140 °
- Die Material: InGaN
- Low Voltage DC Operated
- Board Material: Aluminum

2. Mechanical Dimensions

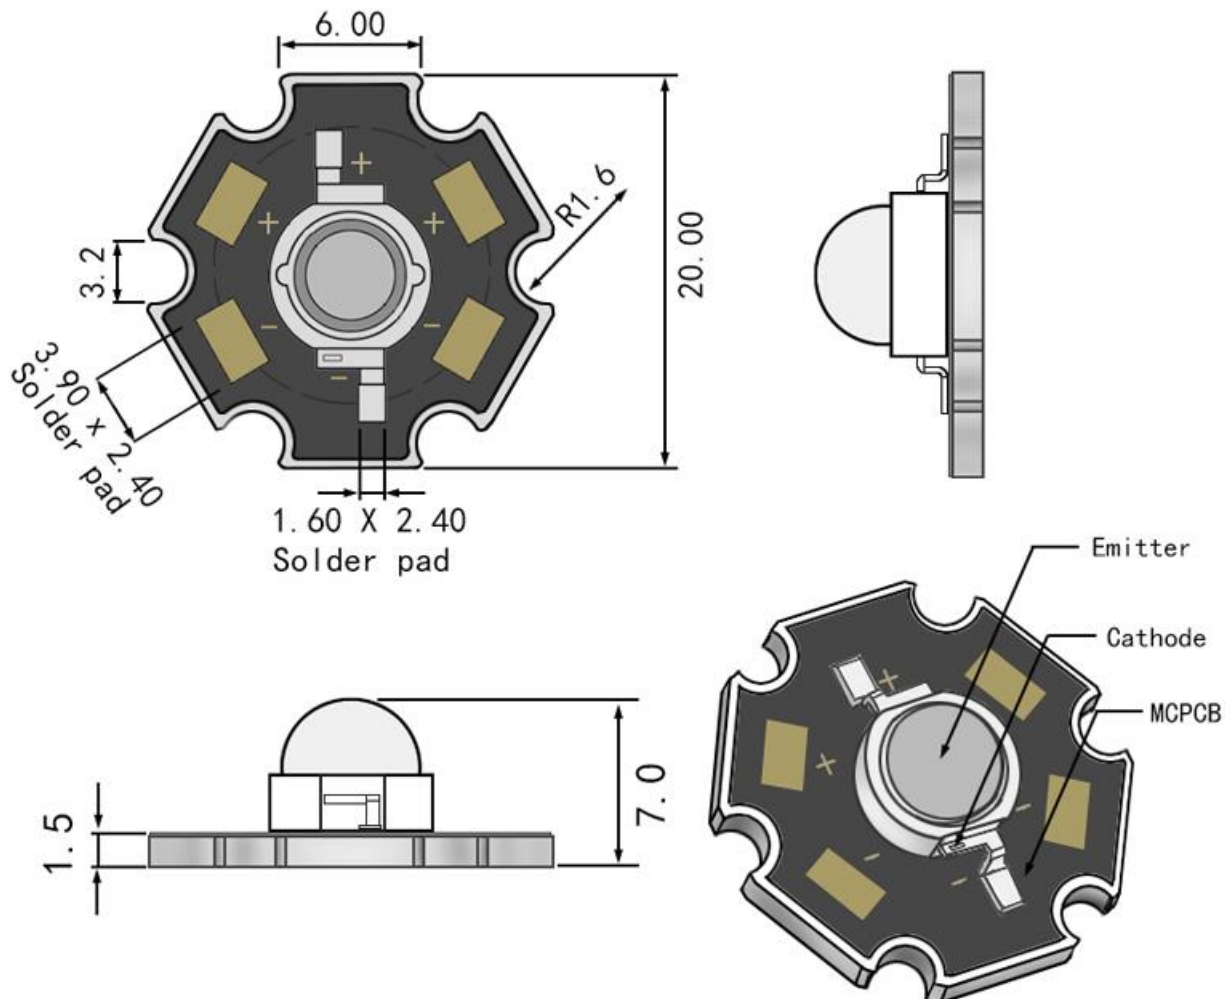

Notes:

1. Dimensions in millimeters (mm)
2. Dimension Tolerance: ± 0.1 mm

3. Absolute Maximum Rating @ Ta = 25 °C

Parameter	Symbol	Maximum Rating	Unit
Continuous Forward Current	IF	350	mA
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	IFP	500	mA
Reverse Voltage	VR	5	V
Power Dissipation	PD	1	W
Electrostatic Discharge	ESD	1000	V
Operating Temperature Range	TOPR	-25°C to +80°C	
Storage Temperature Range	TSTG	-35°C to +100°C	
Lead Soldering Temperature	TSOL	260°C	

4. Optical Character @ Ta = 25 °C

Parameter	Symbol	Color	Min.	Typ.	Max.	Unit	Test Condition
Forward Voltage	VF	WW	3.0	3.2	3.4	V	IF=350mA
Luminous Flux	Φ	WW	140	150	160	lm	IF=350mA
Chromaticity Coordinates	x			0.45		\	IF=350mA
	y			0.42		\	IF=350mA
Color Temperature	CCT	WW	2800	3000	3200	K	IF=350mA
Reverse Current	IR		0		10	μA	VR=5V
Viewing Angle	2θ _{1/2}				140	deg	IF=350mA
Recommend Forward Current	IF (typ)	WW			350	mA	

Notes:


Forward Voltage Tolerance: ± 0.1 V

5. Optical Character Curves

(Unless otherwise specified, all values are measured at 25 °C ambient temperature)


Forward Current vs. Forward Voltage

$T_c = 25^\circ\text{C}$

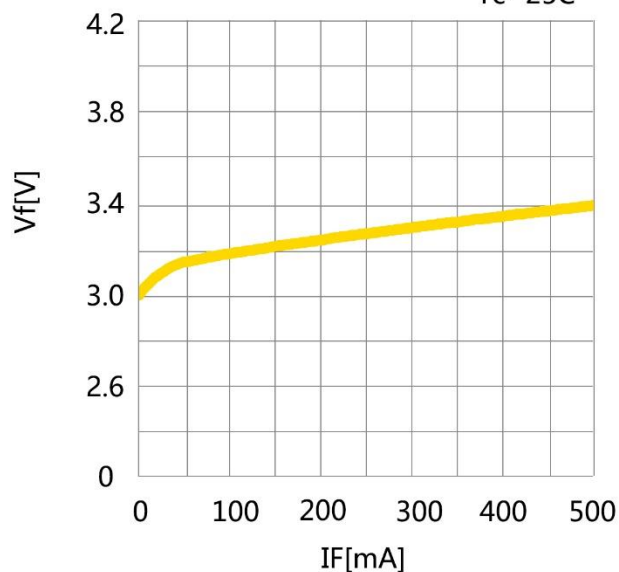


Forward Current vs. Relative Luminous Flux

$T_c = 25^\circ\text{C}$

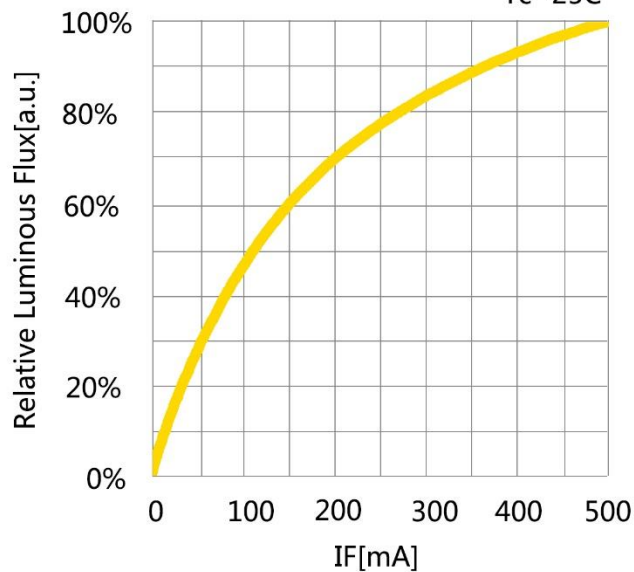


Case Temperature vs. Forward Voltage

$I_f = 350\text{mA}$

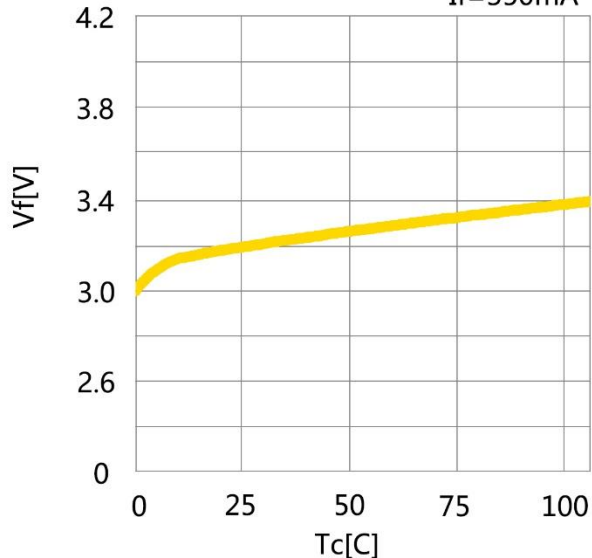


Case Temperature vs. Relative Luminous Flux

$I_f = 350\text{mA}$

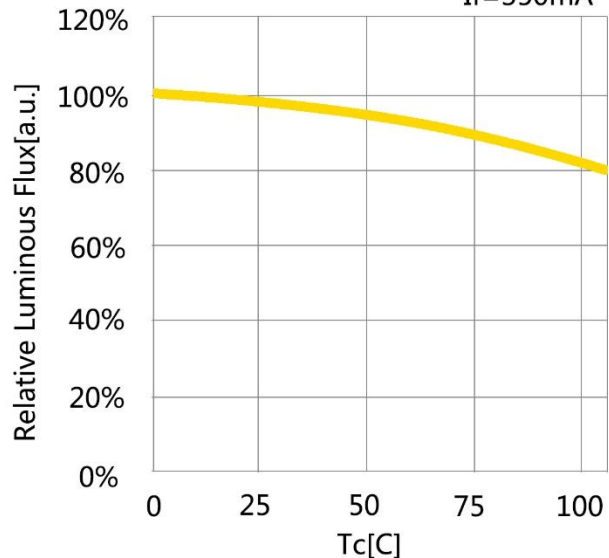

6. Spectrum Curves


IF=350mA

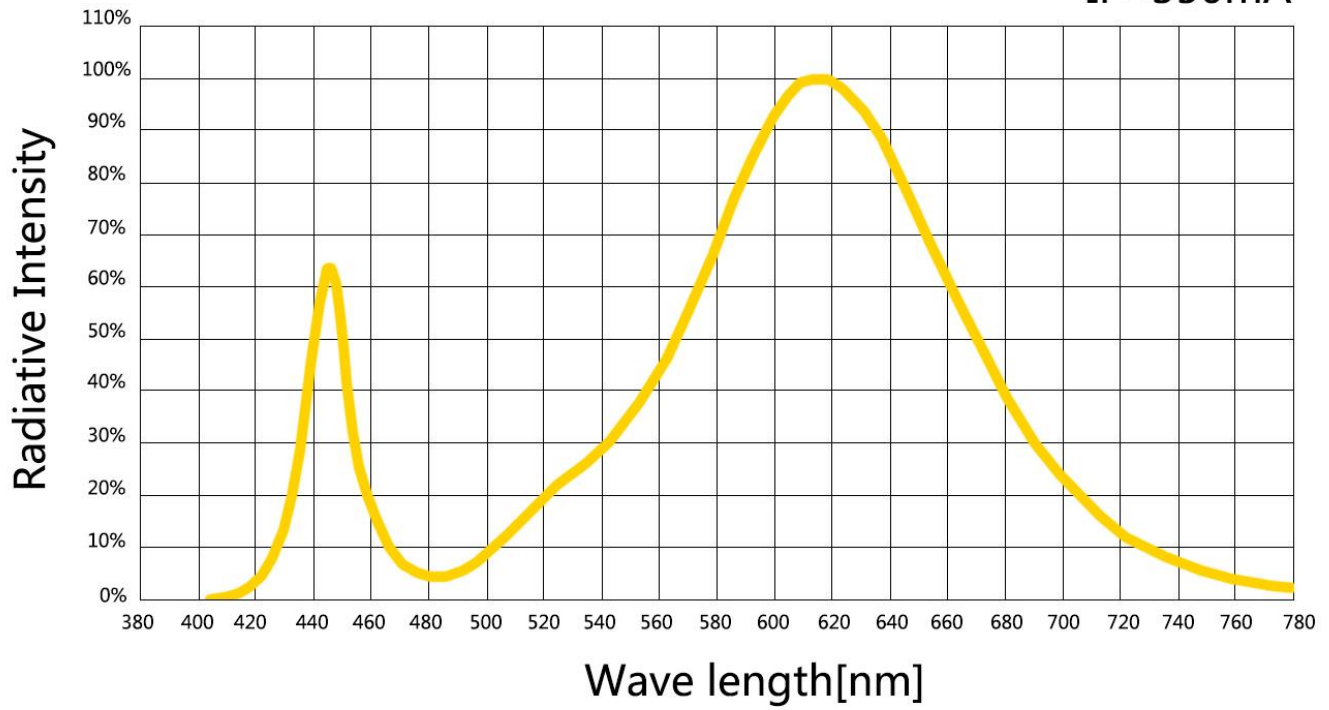

7. Viewing Angle Curves

Radiation Characteristic


IF=350mA

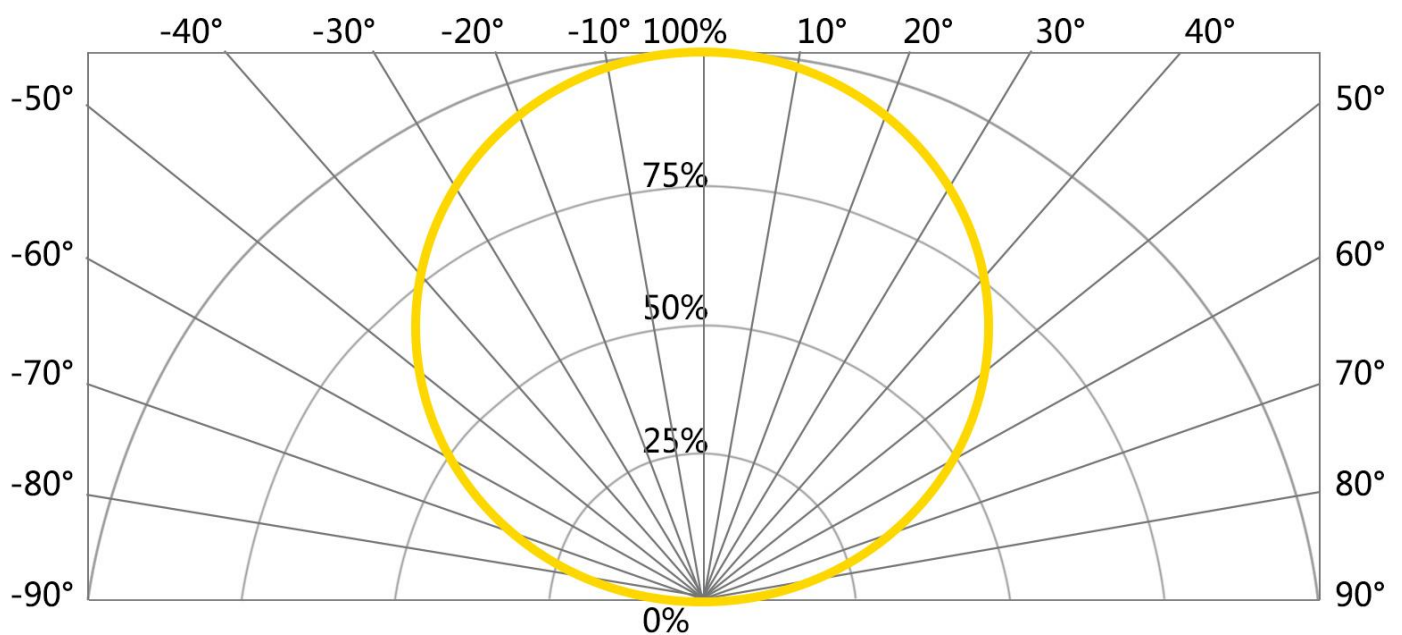

8. Storage & Packaging

Storage & Handling Instructions for Unpacked LED Beads:

1. Immediate Use: Unpacked LED beads are recommended to be soldered within one day.
2. Short-Term Storage (Within 1 week): If not used immediately, re-vacuum seal and store in an environment with a temperature of 20-35 °C and 30-60% relative humidity. If re-vacuum sealing is not possible, store the LED beads in a moisture-proof box, maintaining 25 ± 3 °C and 50-60% humidity.

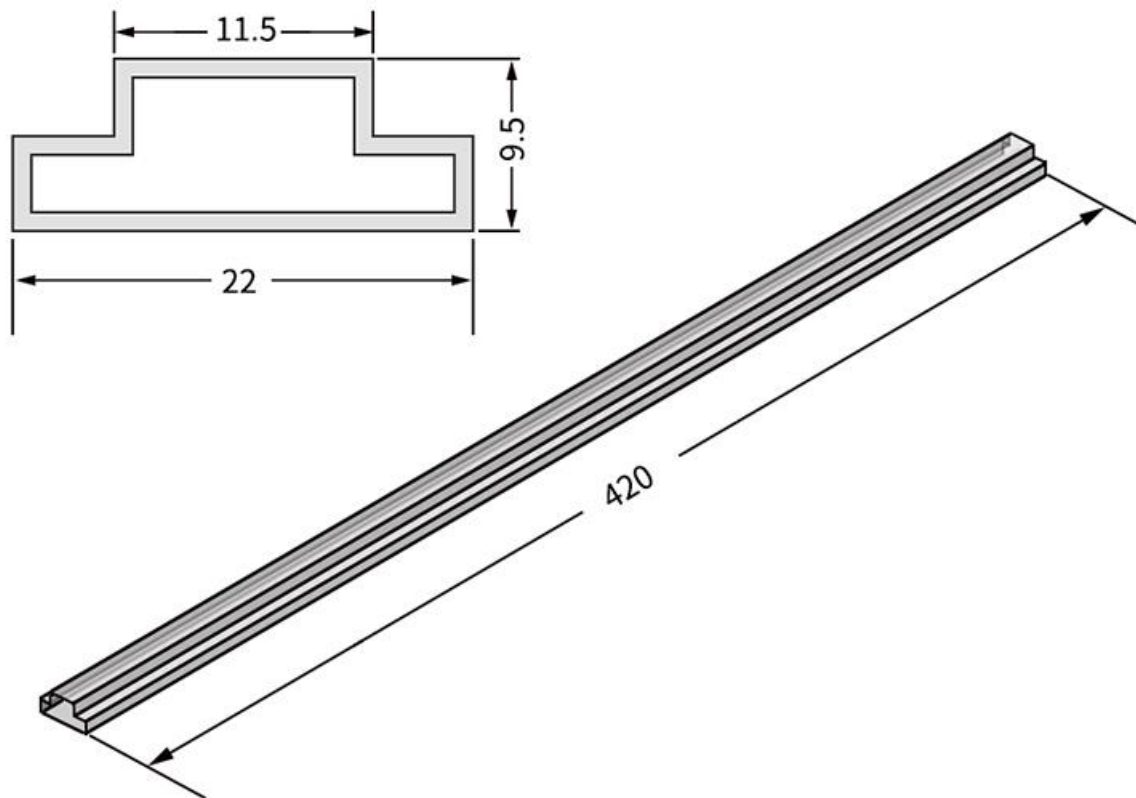

Notes:

1. Quantity: 20pcs/tube
2. Dimensions in millimeters (mm)
3. Dimension Tolerance: ± 0.2 mm